

# H 4065



REAR WHEEL MOUNTING

# Crystalyte

europe

## Technical details

Motor type	Brushless direct drive
Output range	250 - 3000 Watt
Voltage range	24 - 72 Volt
Maximal Amp	50 Amp
RPM / V	8
Torque	55 - 120 Nm
Efficiency	86%
Weight	7,5 kg
Drop out	135 mm
Disc brake mounting	Yes
Sprocket gear	Freewheel mounting
Front or rear wheel	Rear wheel
Controller type	Sensorless and sensed controllers

Magnet width	40 mm
Poles	23 pair
Hall sensors	3 x Honeywell
Bearings	NSK industrial
Sealings	Yes
Motor phase plug	3 x Anderson PP45
Hall sensor plug	Mini XLR 5 pin

### ALSO AVAILABLE WITH RIM & SPOKES

Spokes	SAPIM 125G INOX (size = 2,6 mm)
Rim	EXAL XL25 20", 26" extra brede velg
Rim sizes	20" & 26"



AVAILABLE WITH  
RIM & SPOKES



H 4065


ORDER ONLINE  
[www.crystalyte-europe.com](http://www.crystalyte-europe.com)



## Makes you want to drive electric

e-dr bvba • Hemelrijken 3a • 2890 Sint-Amands • Belgium • +32 (0)52 555 840 • [info@crystalyte-europe.com](mailto:info@crystalyte-europe.com)

## Measurements

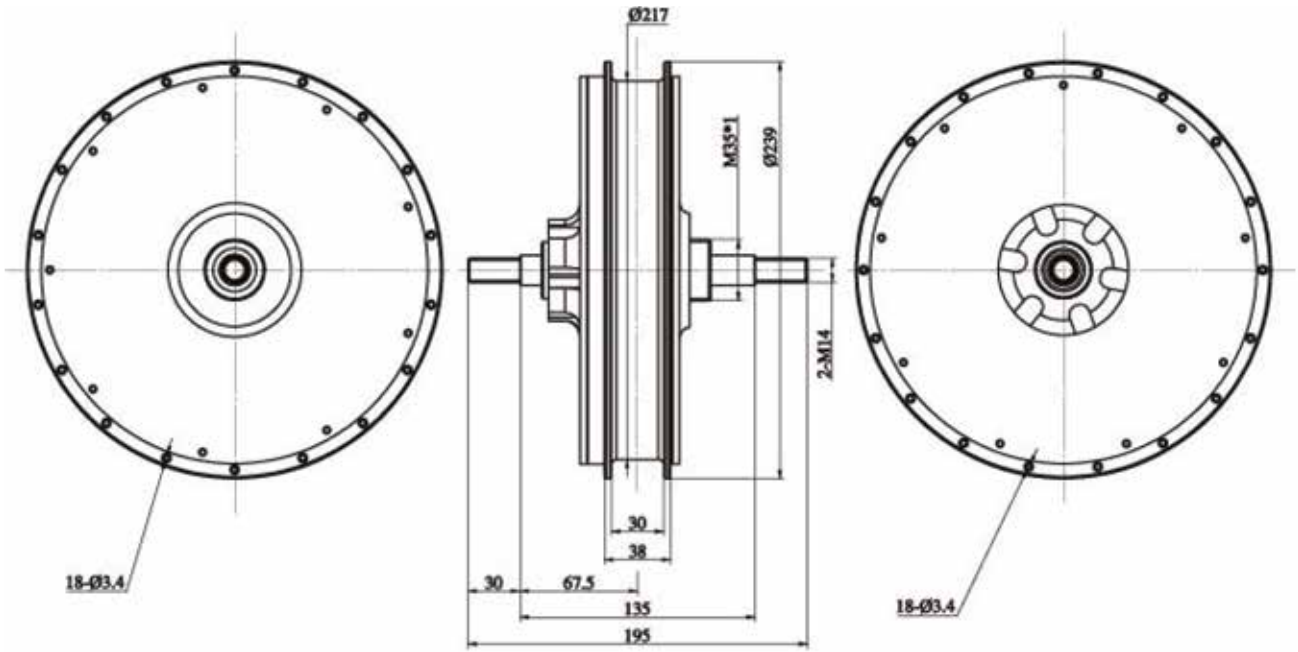

## Speed table

