

G74



FRONT WHEEL MOUNTING

Crystalyte

europe

Technical details

Motor type	Brushless direct drive
Output range	250 - 400 Watt
Voltage range	24 - 48 Volt
Maximal Amp	20 Amp
RPM / V	9,5
Torque	25 - 38 Nm
Efficiency	78%
Weight	3,4 kg
Drop out	75 mm
Disc brake mounting	Yes
Sprocket gear	n/a
Front or rear wheel	Front wheel
Controller type	Sensorless & sensed controllers


Magnet width	25 mm
Poles	22 pair
Hall sensors	3 x Honeywell
Bearings	NSK industrial
Sealings	Yes
Motor phase plug	3 x Anderson PP30
Hall sensor plug	Mini XLR 5 pin

ALSO AVAILABLE WITH RIM & SPOKES

Spokes	SAPIM 13G INOX (size = 2,3 mm)
Rim	EXAL EX19 16 1-3/8" & 20"
Rim sizes	16 1-3/8" & 20"



AVAILABLE WITH
RIM & SPOKES

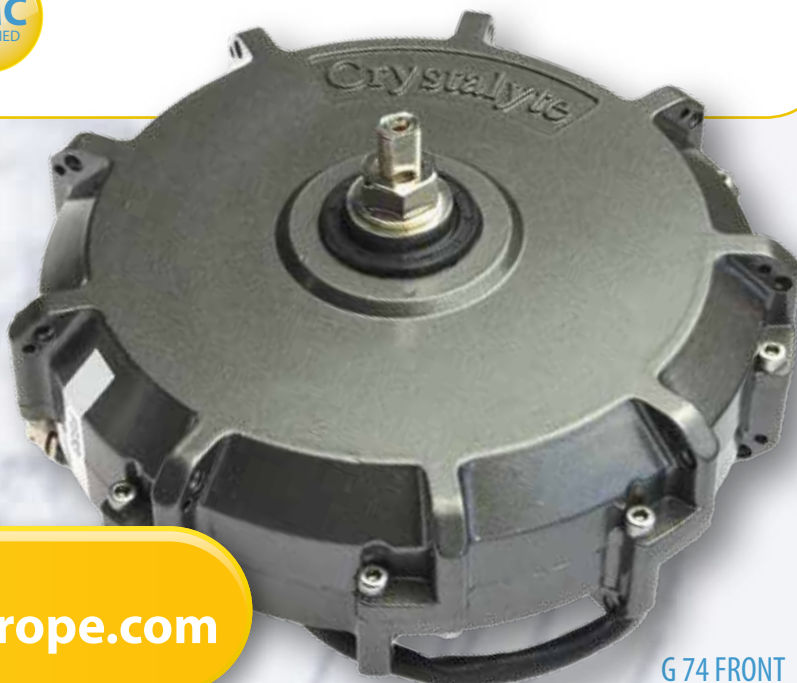


G 74 FRONT

ORDER ONLINE
www.crystalyte-europe.com




Makes you want to drive electric

e-dr bvba • Hemelrijken 3a • 2890 Sint-Amands • Belgium • +32 (0)52 555 840 • info@crystalyte-europe.com

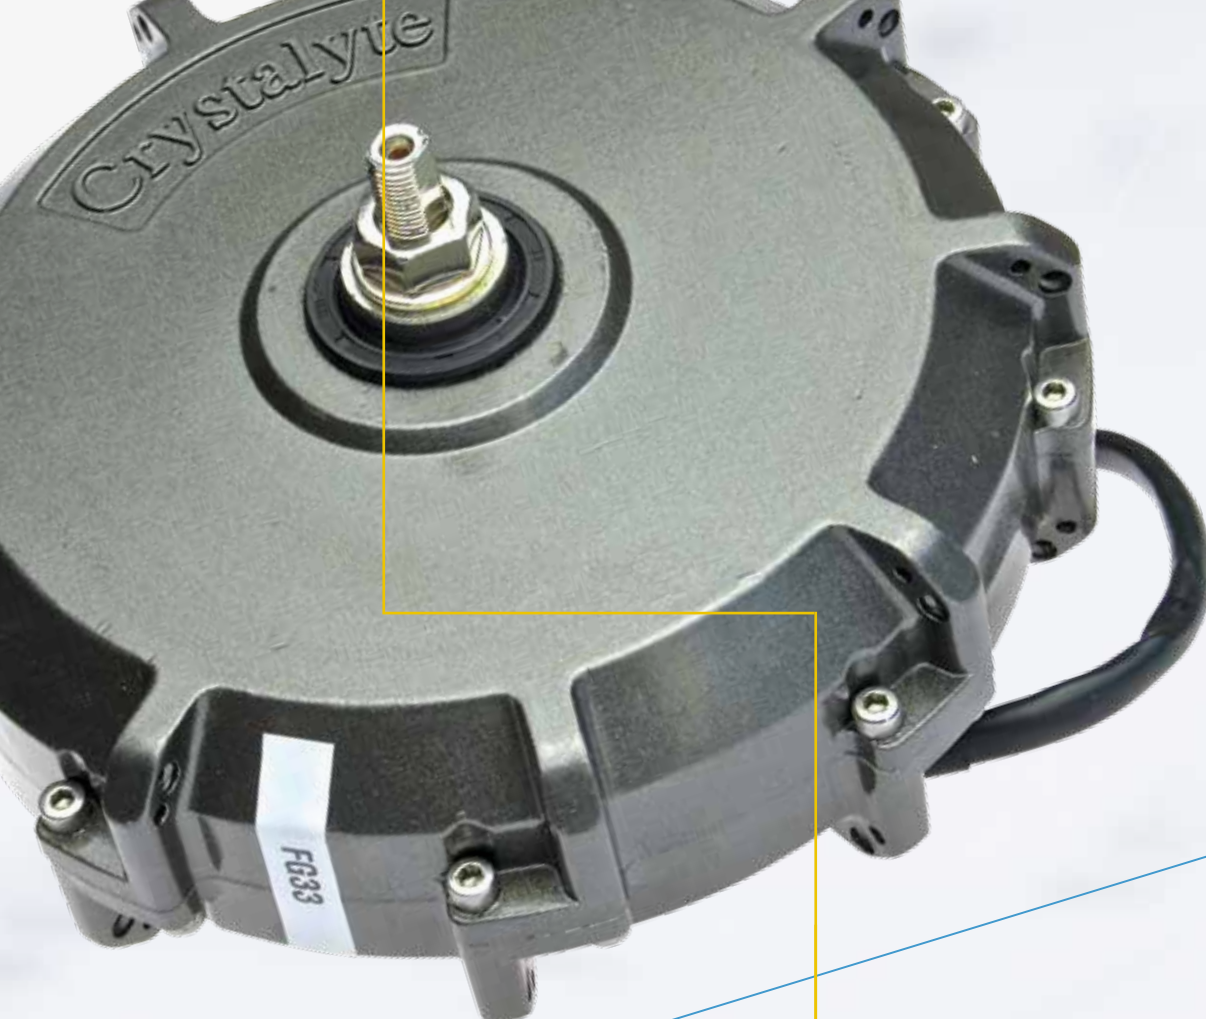

🔧 Test results

Omschrijving	U (V)	I (A)	P1 (W)	M (N.m)	N (rpm)	P2 (W)	Eff (%)
Unload	36,00	1,116	40,19	0,00	355,7	0,00	0,0
Max-Eff	35,71	7,850	280,3	7,06	295,6	218,5	77,9
Max P-out	35,09	21,69	761,5	21,73	198,3	451,1	59,2
Max-Torque	35,01	25,67	899,1	31,57	57,1	188,7	20,9
End	35,01	25,67	899,1	31,57	57,1	188,7	20,9

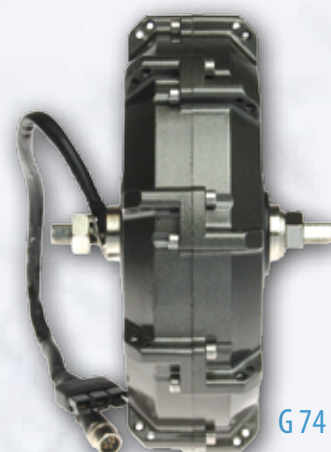

G 74 FRONT

🔧 Speed table

